


# ROAD SAW



Blue Diamond® high flow road saws offer high rates of production at a substantially lower cost than smaller, self-propelled wheel saws. Designed for cutting asphalt and soil trenching, our high flow skid steer road saws offer cutting depths up to 10 or 18 inches! All feature planetary reduction drives, which efficiently provide maximum cutting torque under load. All saws utilize a ground-engaging frame, which provides accurate depth of cut control.

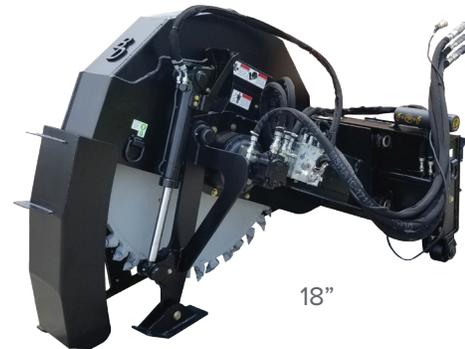

## FEATURES INCLUDE

- Cutting wheels feature replaceable asphalt and soil cutting teeth
- Hydraulic Cutting Depth: 10in Model = 0 to 10 inches; 18in Model = 0 to 18 inches
- Hydraulic Sideshift: 0 to 26 inches
- Available Cutting Wheels: 10in Model = 2.5 & 4.5 inch, 18in Model = 3.0, 4.5 & 6.0- inch
- Requires High Flow Hydraulics at a minimum of 30 GPM at 2,500 PSI
- Water Kit Available

PART NUMBER	MODEL	MIN GPM/PSI	CUT WIDTH	CUT DEPTH	SIDESHIFT	MAX TORQUE	OVERALL HEIGHT	OVERALL WIDTH	WEIGHT
161000-HP*	10"	27/2750	2.5", 4.5"	0" - 10"	26"	-	-	66"	1,200 lbs
161005-HP*	18"	32/3000	3", 4.5", 6"	0" - 18"	26"	4500 lb/ft	60"	66"	2,000 lbs

\* Requires cutting wheel.

PART NUMBER	MODEL	# TEETH	WEIGHT
161505	10" Depth X 2.5"W Cutting Wheel	25	127 lbs
161510	10" Depth X 4.5"W Cutting Wheel	34	165 lbs
161530	18" Depth X 3"W Cutting Wheel	30	372 lbs
161533	18" Depth X 4.5"W Cutting Wheel	34	426 lbs
161535	18" Depth X 6"W Cutting Wheel	60	481 lbs

888-376-7027

info@bluediamondattachments.com

BlueDiamondAttachments.com

888-377-7027

4512 Anderson Rd., Knoxville, TN 37918

Monday - Friday, 8am - 5pm EST

